



MOBILE YARD RAMP

- Lories
- Vehicles
- Containers

Capacity from
9 to 16t



Dock equipment





Manual Lifting

Manual lifting system.

Electric Lifting

Optional
Electric lifting system.



Transport

The access ramp fits a ring which is used for lifting and **transporting the ramp** to the desired point, **with the use of a forklift.**




Wheels

VULKOLAN materials wheels for **smooth movemen** of the ramp to the desired point.


Flooring

The flooring of the ramp consists of a grid of steel blades, which gives excellent grip in the tires of moving **vehicles on the ramp.**



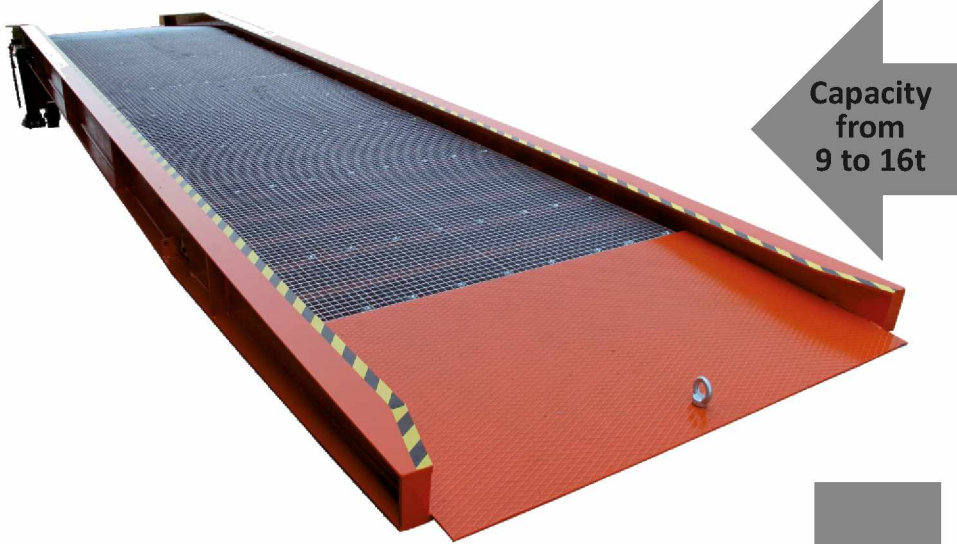

DESIGN
ACCORDING
TO YOUR
REQUIREMENTS
BY CERTIFIED
STEEL

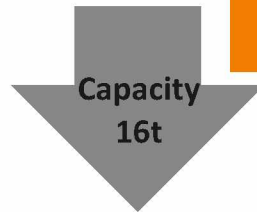

Advantages:

- Quick and safe loading-unloading, without need of using a permanent structure (docking bay)
- Loading-unloading only by one person
- Usage inside and outside of the buildings
- Practical for small areas
- Easy maintenance
- Sturdy construction
- CE certificate



QMSCERT NB 1617





Safety

Safety chain to prevent accidental movement of the truck, that can lead to an accident on people and products.



Optional Equipment

The loading ramp can be adapted with additional equipment such as, protective railings, electrical lifting motor, fire extinguisher case, wheel chocks etc.

Dimensions

Total length:	12.370	mm
Total width:	2.380	mm
Driving width:	2.000	mm
Lip width:	2.187	mm
Height:	(min.) 1.000	mm
	(max) 1.500	mm

Type KLB-R 09

Load carrying capacity:	9.000	k.g
-------------------------	-------	-----

Type KLB-R 13

Load carrying capacity:	13.000	k.g
-------------------------	--------	-----

Type KLB-R 16

Load carrying capacity:	16.000	k.g
-------------------------	--------	-----



KOLIBIOTI BROS & SONS

FORKLIFT - LIFTING EQUIPMENT

11km Thessaloniki - Athens Rd.

P.O. Box 24 57400 Thessaloniki - Greece

Tel: +30 2310 799513, 798014

Fax: +30 2310 797483

www.kolibioti.gr / info@kolibioti.gr